

COT-SS Cotswold Swing Seat

List of parts in fixings pack

- 24 x 70mm Screws**
- 8 x 90mm Screws**
- 4 x Wooden Plugs**
- 2 x 95mm Bolts**

List of parts

- 2 x Side panels with trellis**
- 1 x Back rest for bench**
- 1 x Seat rest for bench**
- 1 x Left arm rest**
- 1 x Right arm rest**
- 4 x Diagonal Brace**
- 1 x Centre cross rail with eye bolt**
- 2 x Cross rails**
- 2 x Chain Assemblies**



Planters are not supplied

When assembling, loosely fix together until fully assembled then tighten all the fixings.

MAIN FRAME

1. Lay the two side trellis panels onto a flat surface.
2. Using two 95mm bolts, fix the centre cross rail into the top of each side panel. (The centre cross rail has two eye bolts fitted with chain & bolts).
3. Fix the front and rear cross rails using four 70mm screws for each rail (two screws in each end).
4. Attach the four corner braces using eight 70mm screws. (Fixed to the front and rear cross rails to the side panels).



IMPORTANT CUSTOMER INFORMATION

To minimise twisting and warping all Hutton garden furniture products should only be used on firm level ground. Softwood is a natural material which can twist and split during periods of wet/dry, hot/cold weather. If cracks do appear, it is a natural occurrence and not a fault with the product or material. The best way to treat this is to use a cloth and rub a little PVA wood glue into the crack and once dry sand the area lightly. This will not affect the treatment of the product.

Hutton Garden and Landscaping Products

Church Lane, Northwood Green, Westbury-on-Severn, Gloucestershire GL14 1ND www.svw2000.co.uk/hutton

Tel: 01452 762089

Fax: 01452 760993

office@hutton-ltd.co.uk


SEAT SECTION

(Unbolt the 140mm bolts ready to fix into seat section).

1. Through the pre drilled holes fix the two 140mm eye bolts with spacers & washers to the top of the arm rest section. (*Photo 1- left hand side*). Using one eye bolt on the outside of each armrest. (*Photo 2 – Right Hand side as you look at bench*) Repeat for the other side.
2. Screw one end of the seat onto the bottom rail of the leg/arm section through the pre drilled holes using two 70mm screws.
3. Screw one side of the backrest into the leg/arm section through the pre drilled holes using two 70mm screws.
4. Through the pre drilled holes fix the two 160mm eye bolts with spacers & washers to the bottom of the arm rest section. The eye bolt needs to pass through the leg/arm and seat section. One eye bolt on the outside of each armrest. *Photos 3 & 4*. Repeat for the other side



Top eye bolt left hand side

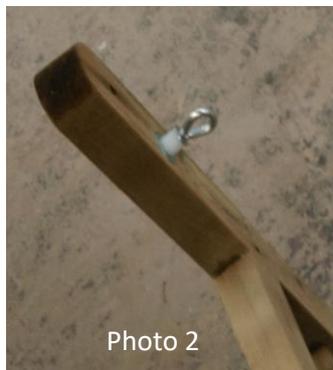

Top eye bolt right hand side



Pre drilled holes in seat section



Eye bolt passing through arm & seat



5. Wooden dowels are supplied to fill in pre drilled holes in the leg/arm sections of the bench.
6. The posts of the side panels are designed to be set into the ground. If you wish to use a post anchor the posts can be cut back in length. (If posts are cut back, then the exposed sawn should be treated).
7. Our large rectangular planters (not supplied) can also be fixed to either side of the Swing Seat. This will give the Swing Seat extra stability.

IMPORTANT CUSTOMER INFORMATION

To minimise twisting and warping all Hutton garden furniture products should only be used on firm level ground. Softwood is a natural material which can twist and split during periods of wet/dry, hot/cold weather. If cracks do appear, it is a natural occurrence and not a fault with the product or material. The best way to treat this is to use a cloth and rub a little PVA wood glue into the crack and once dry sand the area lightly. This will not affect the treatment of the product.

Hutton Garden and Landscaping Products

Church Lane, Northwood Green, Westbury-on-Severn, Gloucestershire GL14 1ND www.svw2000.co.uk/hutton

Tel: 01452 762089

Fax: 01452 760993

office@hutton-ltd.co.uk

Product Care

All Hutton products, where appropriate, come with easy to follow instructions. Please take time to read these carefully before assembling.

Hutton products are built to last with high quality timber to refined designs. Joinery standards are second to none with professional carpenters using pressure treated softwood that offers long-lasting protection against rot, insect and fungal attack. Although the TANALITH wood preservative used in the pressure-treatment process is of the highest quality, it doesn't protect timber from the effects of weather.

Without additional protection UV rays from the sun will weather timber changing the colour to silvery grey. Moisture will negatively affect the lifespan and performance of a timber product, so it's essential to add a high-quality protective water-repellent coating to your Hutton product.

Here are our tips and advice for getting the best out of your product.



Softwood is a natural product that can twist or warp through changes in climatic conditions. To minimise this, Hutton products should always be sited on firm and level ground that is away from areas where water collects.



During the pressure-treatment process, some grain may be raised. If desired this can be removed with a little light sanding.



Green marking may become visible as salt leaves the timber whilst it dries following pressure treatment. It will fade over time and does not affect the performance of the product. Remove any of this solid salt residue with a wire brush or light sanding prior to painting. A micro-porous (breathable) coating will allow any further moisture to evaporate out through the paint.



Changes in the weather may cause fixings to loosen but these can be tightened up as appropriate.



Softwood may at times develop cracks in the surface called 'shakes'. These are a natural occurrence and can be prevalent during changes in temperature and humidity as the timber expands and contracts. Please note that this will not affect the performance or durability of your product. If desired, any 'shakes' can be rectified by applying a proprietary wood glue making sure to follow the manufacturer's instructions at all times. Once dry this can be sanded to a smooth finish. Application of a high-quality protective water-repellent coating can reduce cracking by stopping moisture penetrating into the timber, one of the causes of this natural process in timber products.



Over time the colour of your Hutton product will gradually weather, first to a honey brown and then to a silver grey. This does not indicate any loss of preservative protection. To keep the original colour of your timber you will need to apply a clear wood paint, oil, or stain, that has UV blockers to stop the greying process.



A quality wood paint or oil can be applied to your product to provide protection and colour. Garden designs can benefit from a coloured timber product whether it be a bench, arch, arbour or building, complimenting planting and adding year-round colour. Apply in dry weather and follow the manufacturer's full recommendations.



Some staining can occur on paint coatings as tannins and/or sap/resin come out of the new timber. This is a natural process but a stain-blocking primer and/or knotting agent can be applied prior to painting to minimise potential staining.



Pressure treated products can be painted with a high-quality wood treatment as long as the moisture content is below 18%. Always check with the manufacturer as some treatments can cause the timber to warp or split if it hasn't fully dried.



Sheds are pressure treated but will need additional protection from the weather and in particular, moisture penetration. Apply a high-quality water-repellent paint or oil to help seal the shed, making sure that joints and fixings such as nails and screws, are well covered. A good microporous coating will allow any internal moisture to evaporate out through the external coating.



When applying a wood paint, oil, or stain, pay particular attention to horizontal surfaces and areas that can collect water. Coatings will degrade quickest on a horizontal plane with cheaper products wearing faster. Vertical surfaces can last for years before a maintenance coat is required.



Maintain your timber product on an annual basis, or sooner if required. Clean paint coatings with soapy water and apply a maintenance coat when required. The better the quality the more years it will be before a maintenance coat is needed. Untreated timber products should be cleaned with soapy water or a wood cleaner.



In the unlikely event a product is faulty or damaged upon delivery, any issue must be advised within a reasonable period. The definition of reasonable depends on the product and how obvious the fault is, however, even with more complex items you should work on the basis that this is no more than three to four weeks from receipt. This does not affect your statutory rights.



Whilst your delivery driver is present ensure that you check your shipment before signing the delivery receipt, as notifications of damages or shortages should be noted on the signed proof of delivery.



To view our tutorial videos on product maintenance, please visit www.svw2000.co.uk/you-tube-videos